



PRODUCT CATEGORY

TRM-203/403

TRANSFORMER RESISTANCE METERS



PRODUCT CATEGORY

TRM-203/403

Transformer Resistance Meters



PRODUCT OVERVIEW

The TRM-203 and TRM-403 are three phase transformer winding resistance meters that allow the user to connect all test cables to the transformer bushings. The unit will then measure the transformers resistance value for each of the phases without the need to disconnect and reconnect cables for each phase.

The TRM-203/403 can provide fast and stable readings of very large transformers by utilizing a 60Vdc power supply. The TRM-203 is capable of outputting a selectable test current from 1A to 20A while the TRM-403's test current is selectable from 1A to 40A.

Since both units can accurately measure resistance from 1 micro-ohm to 500 Ohms (up to 2000 Ohms for the TRM-203), they can be used as micro-ohmmeters to measure EHV circuit breaker contact resistance, or for any low resistance measuring application.

For a Delta transformer, the TRM-203/403 can measure the phase resistance readings and provide the individual Delta winding resistance values. The TRM-203/403 can also provide the individual winding resistance values for a Wye transformer without the neutral terminal.

If the transformer winding resistance temperature is available at the time of testing, the TRM-203/403 can calculate the equivalent of resistance value at any temperature value. This useful feature can be used to compare the field readings against factory test resistance values.

A special test mode allows the TRM-203/403 to collect data automatically for up to 90 minutes at a 60-second sampling interval (10, 15, 20, and 30 second sampling rates are also available; duration will vary accordingly.) Test data is recorded with a time stamp.

All test results can be printed on the unit's built-in 2.5" wide thermal printer. Test record header information including the Company, substation name, transformer information, and operator name can also be entered.

The TRM-203/403 can automatically demagnetize the inductive device under test, eliminating the manual task of demagnetizing the transformer core after a resistance test.

The TRM-203/403 also has a "make-before-break" test mode that can be used to test the Load Tap Changer (LTC) of Voltage Regulator contact test sequence. The TRM-203/403 produces a "Dynamic-Resistance" graph of the LTC or Voltage regulator contact under operation. An opened contact can be detected visually from this resistance chart.

The TRM's built-in LTC/Voltage regulator can be used to conveniently change the LTC/Voltage regulator tap position from the TRM-203/403 front panel.



PRODUCT CATEGORY

TRM-203/403

Transformer Resistance Meters



User Interface

The TRM-203/403 features a back-lit graphic LCD screen (240 x 128 pixels) that is clearly visible in both bright sunlight and low light levels. A 44-key "QWERTY"-style membrane keypad is used to enter test information and operate the unit.

Computer Interface

The TRM-203/403 can be connected to a PC via the unit's RS-232C, USB, or Bluetooth interface. A PC can be used to control the TRM-203/403 to perform transformer resistance tests. Test records (stored in the TRM-203/403 or a USB Flash drive) can also be retrieved, reviewed, and printed. Test records are automatically exported to PDF, Excel, and XML formats.

Safety Features

The TRM-203/403 automatically dissipates the energy stored in the transformer at the end of each test. The discharge circuit will continue to work even if the TRM-203/403 power supply is lost.

Test Record Storage

The TRM-203/403 can store up to 256 static test records (111 tests per record) and 120 dynamic test records internally. For external test record storage, the TRM-203/403 features a USB Flash drive interface port. Up to 999 test records can be stored on a connected USB Flash drive.


Outstanding Features

- Perform three phase test on a transformer without the need to switch cables
- Can provide individual Delta winding resistance values
- Can provide individual Wye (with no neutral) winding resistance values
- Demagnetize transformer after test
- Selectable test current from 1A to 20A (TRM-203) and 1A to 40A (TRM-403)
- Computer control via RS-232C, USB, or bluetooth wireless interface
- Built-in 2.5" wide thermal printer

Ordering Information

Part No.	Description
9060-UC	TRM-203, cables, and PC software
9006-UC	TRM-403, cables, and PC software
TP3-CS	TP3 thermal printer paper (36 rolls)


TRM-203/403 Connections

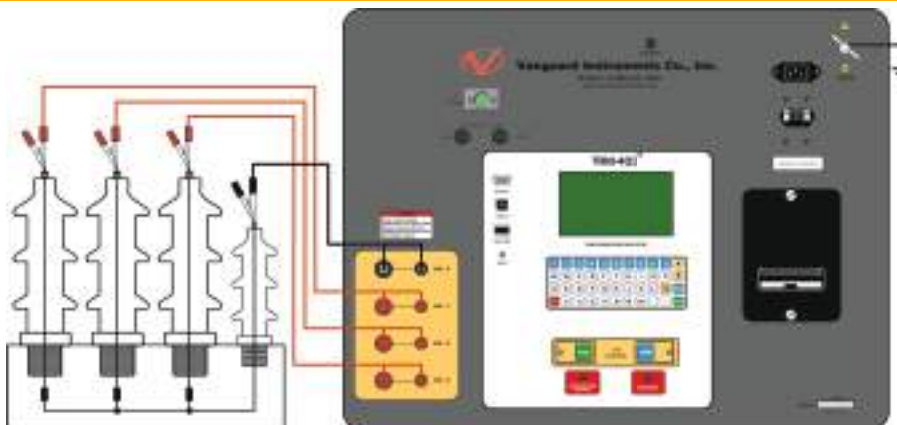

Thermal Printer Output

RECORD NUMBER 7
TEST RESULTS
DATE: 03/28/11 TIME: 14:21:17
COMPANY: VIC
STATION: LAB
CIRCUIT: VR1
MPR: 02
MODEL: STEP VR
SN: Q25869 TOK
KVA RTG: 75
OPERATOR: VN
V1 & V2 TEST
TESTED AT 40 AMPS
R1 = 3.457 MILLI-OHMS
R2 = 3.559 MILLI-OHMS
I = 39.991 AMPS
TAP/WINDING: _____

TRM-203/403 Features

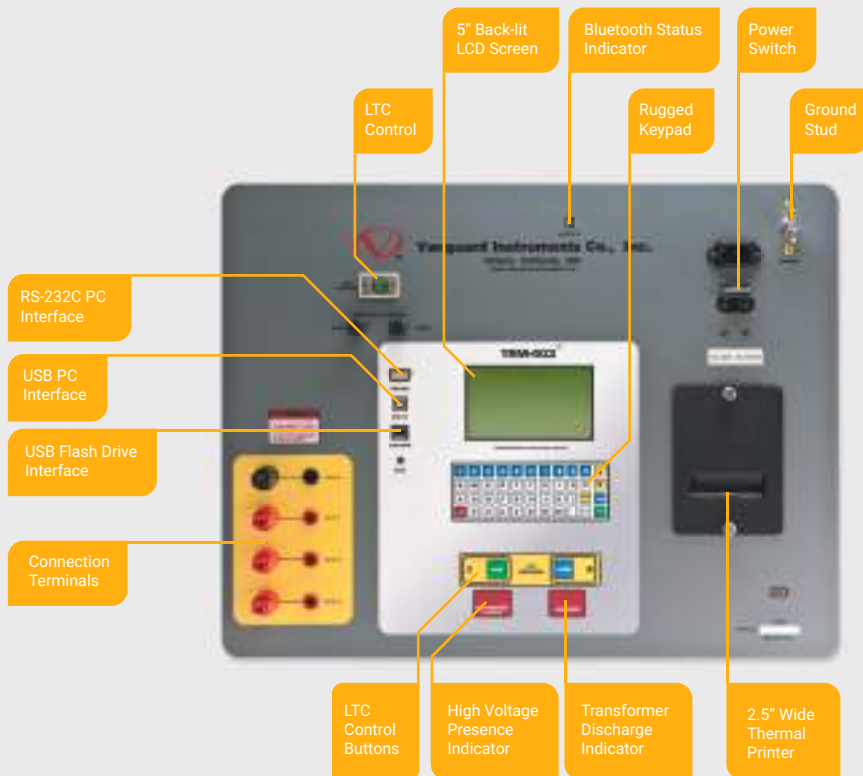

TRM-203/403 Technical Specifications


	Physical Specifications	Dimensions: 21"W x 17"H x 9" D (53 cm x 43 cm x 24 cm) Weight: 35 lbs. (15.8 Kg)		Input Power	100 ~ 240 Vac, 50/60 Hz
	Resistance Reading Range	TRM-203: 1 micro-ohm ~ 2,000 ohms TRM-403: 1 micro-ohm ~ 500 ohms		Test Currents	TRM-203: 1A ~ 25A in 1A increments TRM-403: 1A ~ 40A in 1A increments
	Accuracy	1 ~ 19,999 micro-ohms: $\pm 0.5\%$ reading, ± 1 count 20 ~ 999 milliohms: $\pm 1\%$ reading, ± 1 count 1 ~ 2,000 ohms: $\pm 1.5\%$ reading, ± 1 count		Input Channels	4 input channels for measuring resistance
	Display	5" back-lit LCD screen (240 x 128 pixels) Viewable in bright sunlight and low-light levels		Test Voltage	60 Vdc charging, 18 Vdc max during measurement
	Printer	Built-in 2K" wide thermal printer		AC Current Input	Clamp-on current sensor, 1 ~ 20 A
	PC Software	Windows®-based software is included with purchase price		Computer Interfaces	One RS-232C port, one USB port, one USB flash drive port, bluetooth
	Internal Test Record Storage	256 static test records (each can contain up to 111 readings) and 120 dynamic test records		Load Tap Changer Contact	Designed to meet IEC 61010 (1995), UL 61010-a, and CAS-C22.2 standards
	External Data Storage	Up to 999 test records on external USB flash drive (Drive not included)		Safety	Designed to meet UL 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards
	Temperature	Operating: -10°C to +50°C (+15°F to +122°F) Storage: -30°C to +70°C (-22°F to +158°F)		Humidity	90% RH @ 40°C (104°F) Non-condensing
	Cables	Four 50-foot (15.24m) test cables, one LTC control cable, one ground cable, one power cord, one USB cable		Altitude	2,000 m (6,562 ft) to full safety specifications
	Options	Shipping case		Warranty	One year on parts and labor

NOTE : the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.

TRM-203/403 Desktop Printer Output

Static Resistance Test Results


Dynamic Resistance Test Graph

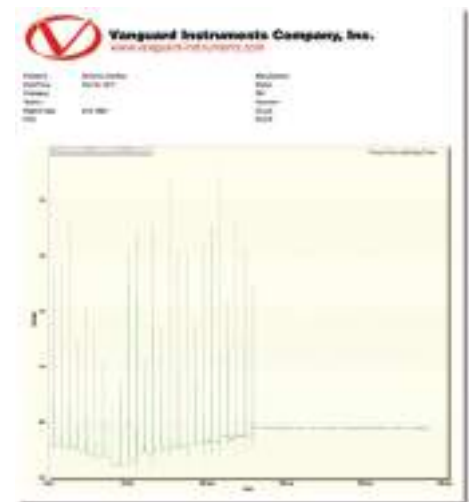

TRM-203/403 Thermal Printer Output

Test Results for a Delta Transformer


TEST RESULTS	
DATE: 01/11/15 TIME: 09:44:24	
COMPANY: COMPANY 2	
STATION: STN 3	
CIRCUIT: CIR 4	
HPR: MAN 5	
MODEL: MOD 6	
SN: SN 7	
KVA RTG: KVA 8	
OPERATOR: OPER 9	
DELTA TEST	
EQUIVALENT RESISTANCE DATA	
MEAS TEMP Tm = 25.0C 77.0F	
REF TEMP Tr = 75.0C 167.0F	
ALUMINUM WINDINGS, Tk = 225.0C	
Rs = Rmeas x C(Tm+Tk)/(Tr+Tk)2	
All temps for eqn are in deg C	
PHASE A H1-X1 - H1-X3	
Rm = 2.4007 OHMS	Phase A measured resistance
Rs = 2.8908 OHMS	Calculated phase A resistance at reference temp.
Rw = 3.9895 OHMS	Calculated phase A winding resistance
Rws = 4.7874 OHMS	Calculated phase A winding resistance at reference temperature
I = 0.994 AMPS	
PHASE B H1-X2 - H1-X1	
Rm = 2.1127 OHMS	
Rs = 2.5352 OHMS	
Rw = 3.0278 OHMS	
Rws = 3.6334 OHMS	
I = 0.995 AMPS	
PHASE C H1-X3 - H1-X2	
Rm = 2.1018 OHMS	
Rs = 2.5221 OHMS	
Rw = 3.0004 OHMS	
Rws = 3.6005 OHMS	
I = 0.995 AMPS	

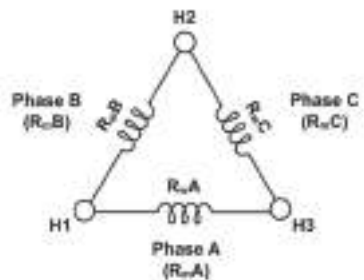

Sample test results showing individual winding resistance values for a Delta transformer. The TRM-203/403 can also calculate the phase resistance and individual winding resistance values at a given reference temperature (Rs and Rws, respectively).

Test Results for a Wye Transformer


TEST RESULTS	
DATE: 01/11/15 TIME: 09:27:56	
COMPANY: COMPANY 2	
STATION: STN 3	
CIRCUIT: CIR 4	
HPR: MAN 5	
MODEL: MOD 6	
SN: SN 7	
KVA RTG: KVA 8	
OPERATOR: OPER 9	
Y (no Neut) TEST	
EQUIVALENT RESISTANCE DATA	
MEAS TEMP Tm = 25.0C 77.0F	
REF TEMP Tr = 75.0C 167.0F	
ALUMINUM WINDINGS, Tk = 225.0C	
Rs = Rmeas x C(Tm+Tk)/(Tr+Tk)2	
All temps for eqn are in deg C	
PHASE A H-X1 - H-X3	
Rm = 3.0176 OHMS	Phase A & C measured resistance
Rs = 3.6212 OHMS	Calculated phase A resistance at reference temp.
H-X1 - H-X0	
Rw = 1.9984 OHMS	Calculated phase A winding resistance
Rws = 2.3981 OHMS	Calculated phase A winding resistance at reference temperature
I = 0.993 AMPS	
PHASE B H-X2 - H-X1	
Rm = 2.4980 OHMS	
Rs = 2.9976 OHMS	
H-X2 - H-X0	
Rw = 499.64 MILLI-OHMS	
Rws = 599.57 MILLI-OHMS	
I = 0.994 AMPS	
PHASE C H-X3 - H-X2	
Rm = 1.5189 OHMS	
Rs = 1.8227 OHMS	
H-X3 - H-X0	
Rw = 1.0193 OHMS	
Rws = 1.2231 OHMS	
I = 0.996 AMPS	



Sample test results showing individual winding resistance values for a Wye transformer with no accessible neutral. The TRM-203/403 can also calculate the phase resistance and individual winding resistance values at a given reference temperature (Rs and Rws, respectively).

Trip Saver Box (TSB) Option (part number 9062-UC)

The Vanguard TSB (sold separately, part number 9062-UC) can be used with a Vanguard ATRT-03 and TRF series turns ratio testers to perform transformer turns ratio tests using the same cable set provided with the TRM-203/403. Using the TSB, there is no need to connect and reconnect cables from the transformer after the initial connections are made. The user can conveniently perform resistance tests using the TRM-203/403 and turns ratio tests using an ATRT-03 or TRF instrument without having to make trips to the transformer to connect and disconnect cables.

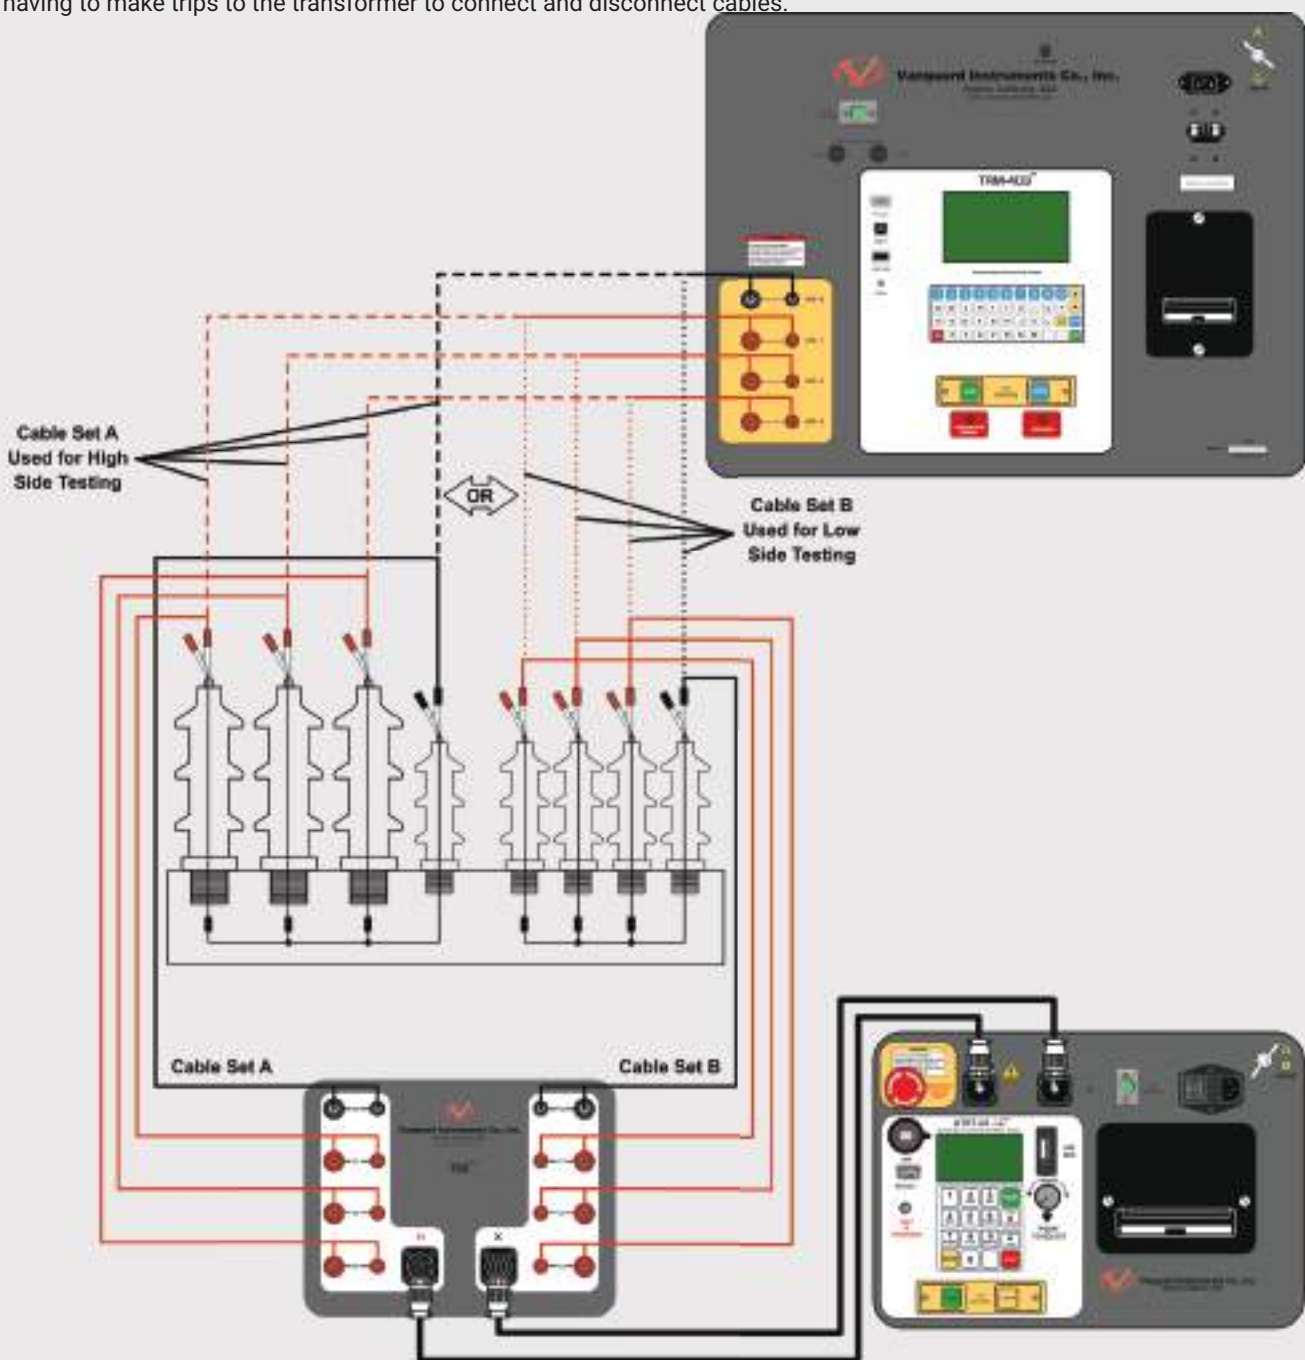

Doble Engineering
Worldwide Headquarters
123 Felton Street, Marlborough, MA 01752
USA tel +1 617 926 4900 | fax +1 617 926 0528
www.doble.com

Specifications are subject to change without notice. Doble is an ISO 9001 & ISO/IEC 17025 & 17034 Certified Company. Doble is an ESCO Technologies Company. PUBLISHED: AUGUST, 2025

www.doble.com